


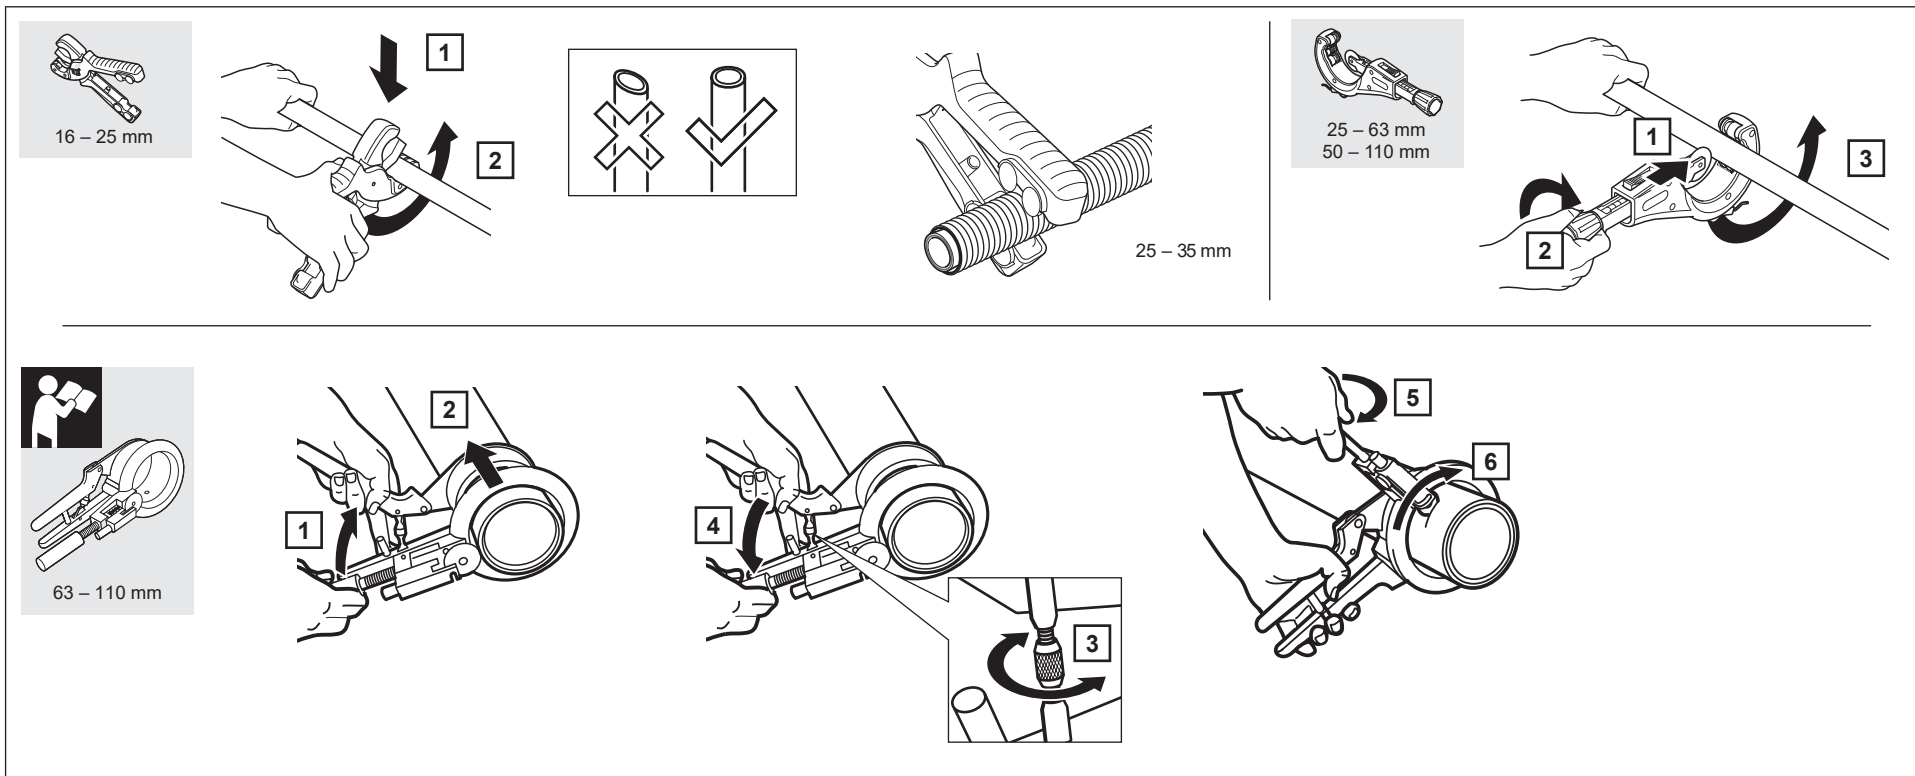
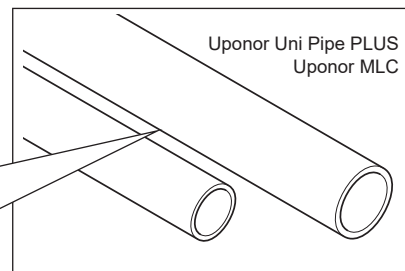
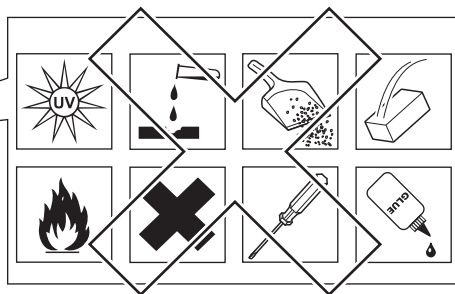
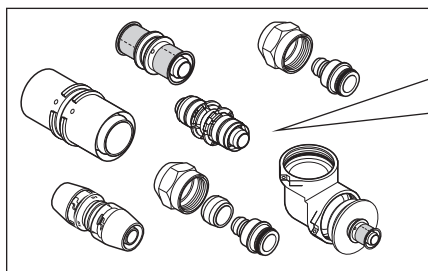
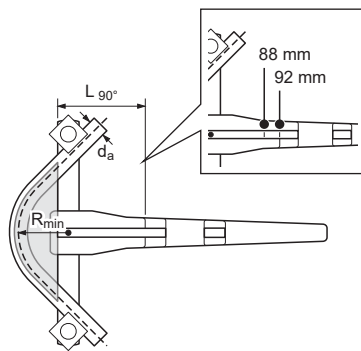
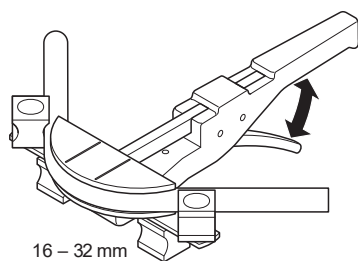
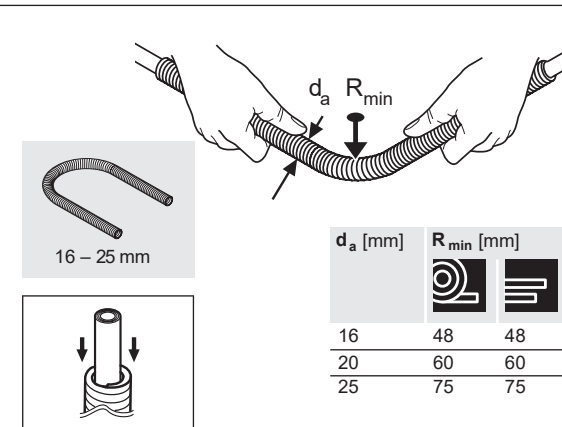
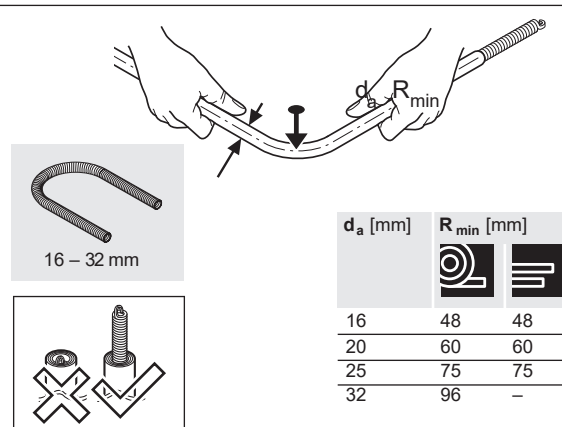


Uponor Uni Pipe PLUS 16–32 mm, Uponor MLC 14 mm und 40–110 mm

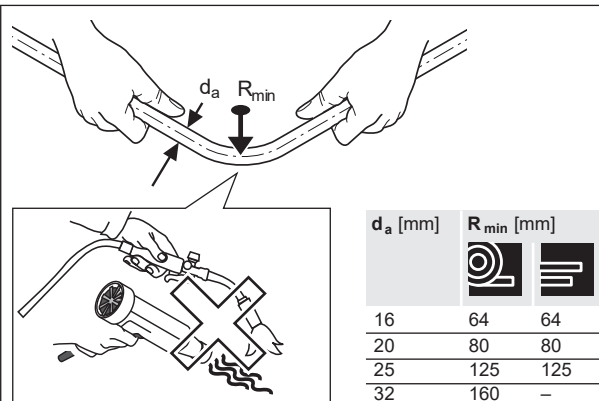

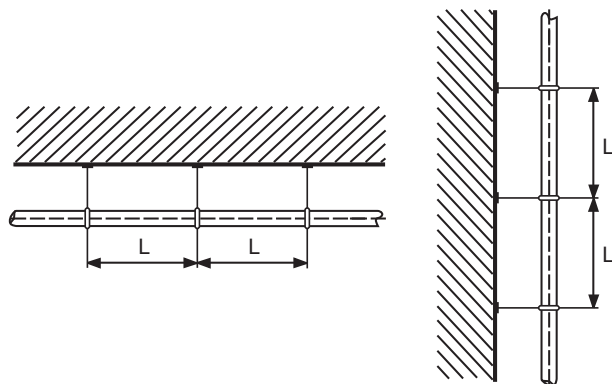


d _a [mm]	R _{min} [mm]	R _{min} [mm]	L _{90°} [mm]
16	32	32	92
20	40	40	88
25	62,5	62,5	92
32	80	80	88

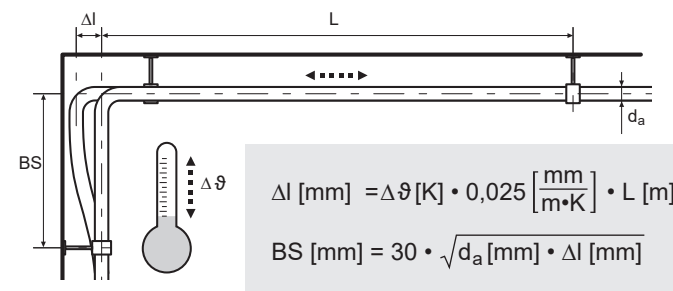


Pipe dimension d _a x s [mm]	Maximum fastening distance between the pipe clamps L [m]		
	horizontal		vertical
14 x 2.0	1.20	-	1.70
16 x 2.0	1.20	2.00	2.30
20 x 2.25	1.30	2.30	2.60
25 x 2.5	1.50	2.60	3.00
32 x 3.0	1.60	2.60	3.00
40 x 4.0	-	2.00	2.20
50 x 4.5	-	2.00	2.60
63 x 6.0	-	2.20	2.85
75 x 7.5	-	2.40	3.10
90 x 8.5	-	2.40	3.10
110 x 10.0	-	2.40	3.10






optional


16 – 32 mm



S-Press PLUS
S-Press PLUS PPSU





16 – 32 mm





S-Press


16 – 25 mm




40 – 110 mm

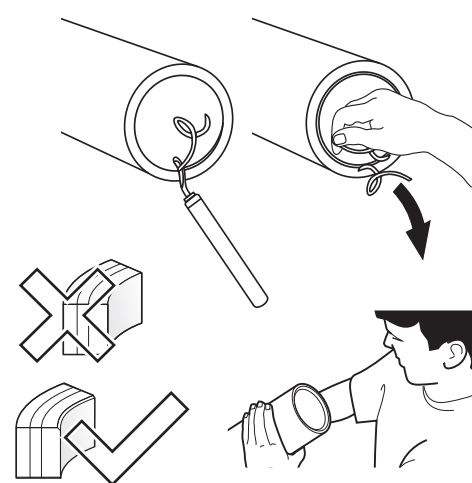







16 – 25 mm




RTM

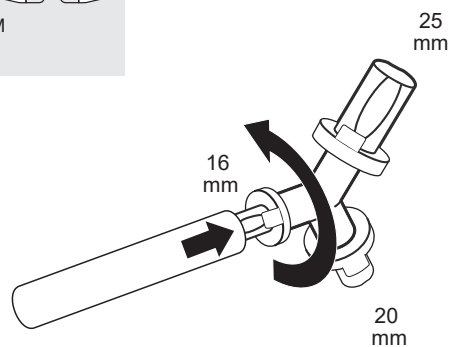









						
						
 S-Press PLUS S-Press PLUS PPSU	16 – 20	16 – 32	–	–	16 – 32	–
 S-Press	14 – 20	14 – 32	–	–	14 – 32	–
 S-Press S-Press PPSU	–	–	40 – 50	63 – 75	–	–
 RS	–					–
 Uni	–	–	–	–	–	14 – 25
 RTM	–	–	–	–	–	16 – 25

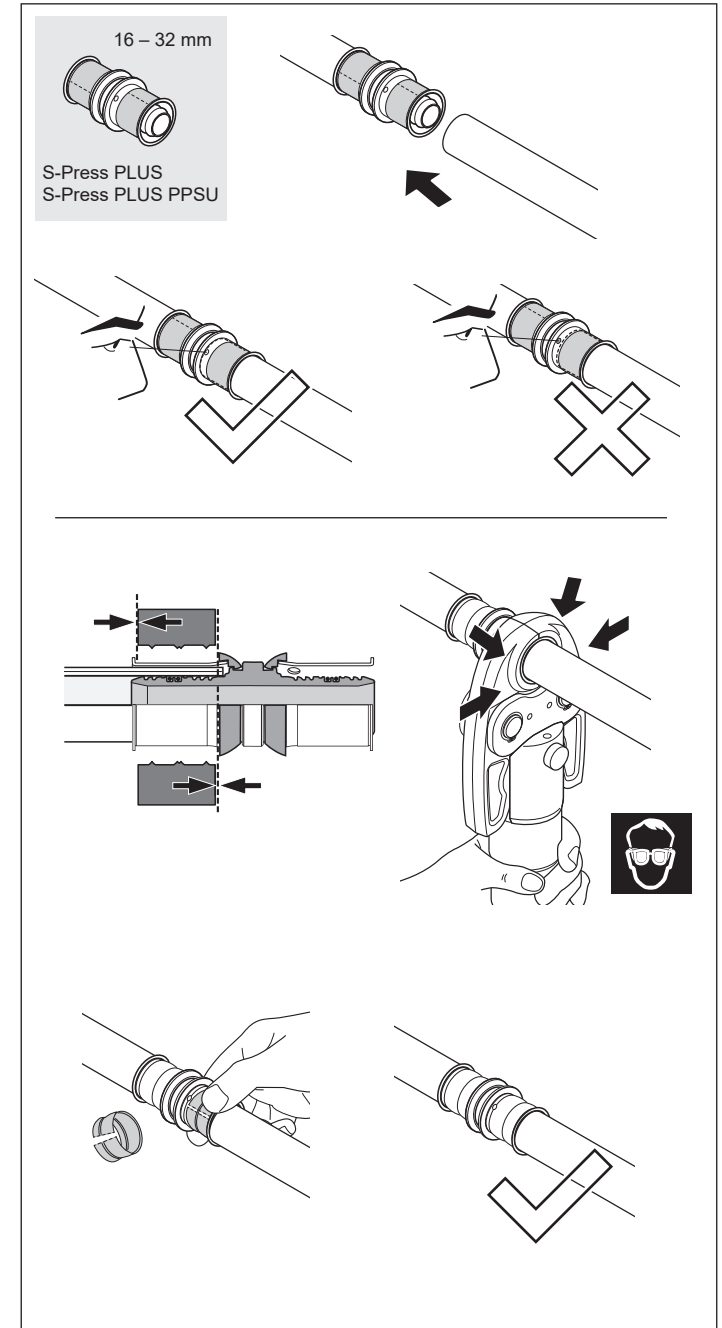


40 – 50 mm



S-Press
S-Press PPSU

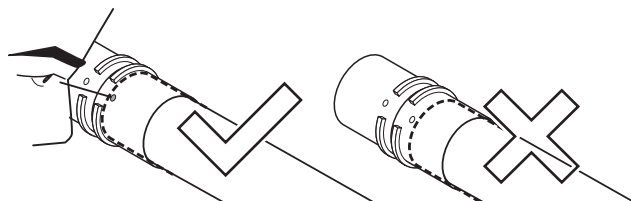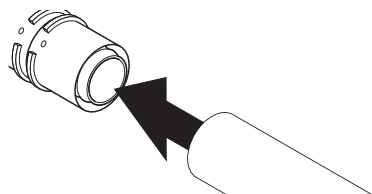

63 – 75 mm



S-Press PPSU

